




## Door Latch for Dryers

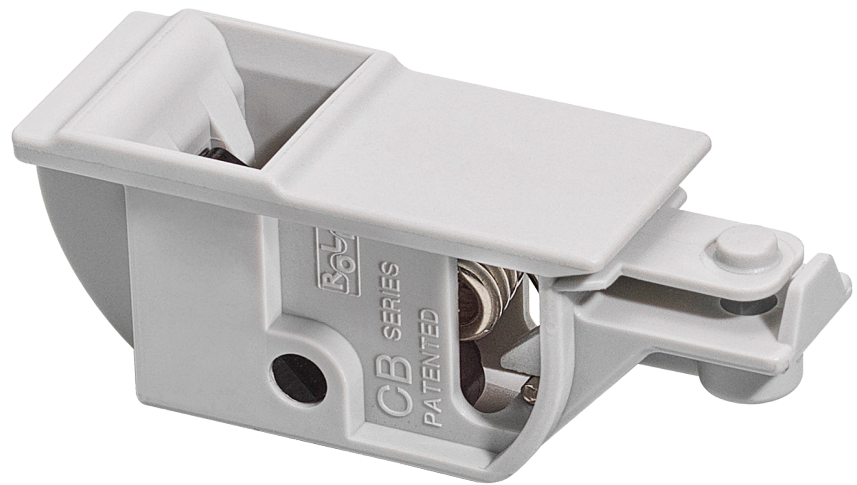

### Description

Safety door retaining pull to open device for dryers with extended stroke (7mm) composed of two plastic parts and a torsion spring.

Its main functions are to keep the door closed and to prevent the movement of the dryer door during the working cycle. The product has been designed for both the domestic and semi-

professional markets. Push to close / Pull to open kinematics. Reduced dimensions allow the application even in dryers with large drums.

Low deviation of opening force after lifecycle. It takes advantage of the concept of reversibility (opening orientation to the left <-> to the right of the door).

### Main Benefits

- Reduced dimensions and door reversibility on the user side
- Low deviation of opening force after lifecycle



### Certifications





# Rold CB Series

## Dryer Door Latch

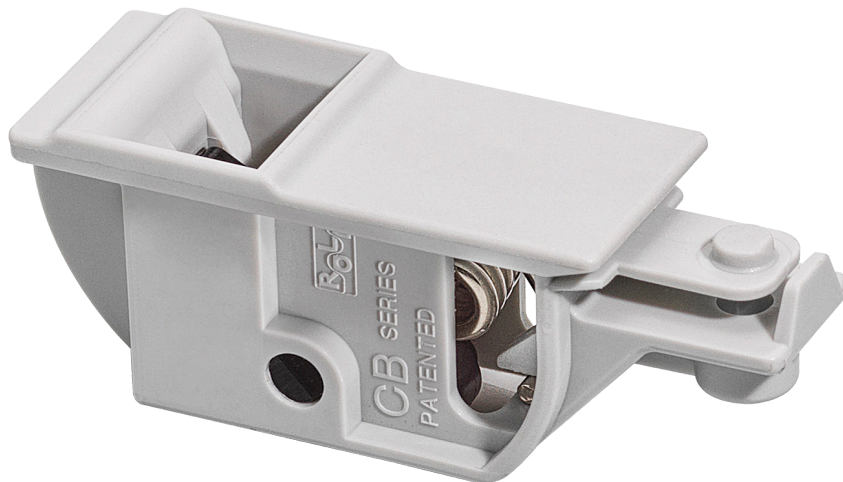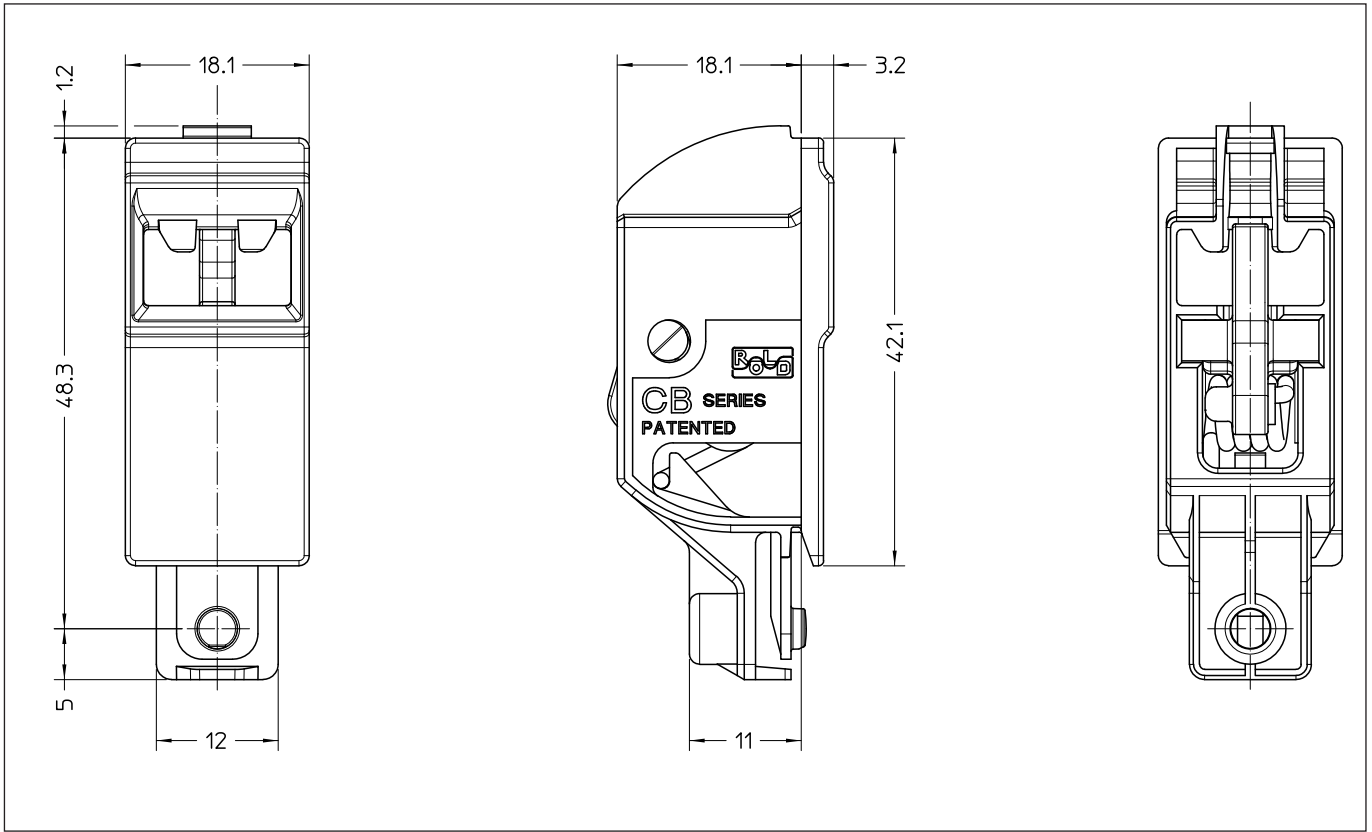

All products are approved to current Quality Standards. The Company reserves the right to make technical modifications to improve the product. Sizes indicated are not binding. For special applications, not mentioned here, please ask the manufacturer for further information. Uncorrect electrical wiring or assembling may cause overheating of the switch and consequent risk of short-circuit and fire. Update: March 2022